


BOMAG

FAYAT GROUP

Vibratory Tamper BT60/4 BT65/4



All around engine protection.

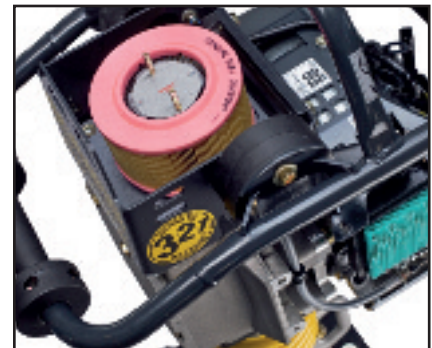


Dual air filter system helps extend the life of the engine.



Technical Specifications

BT60/4 BT65/4

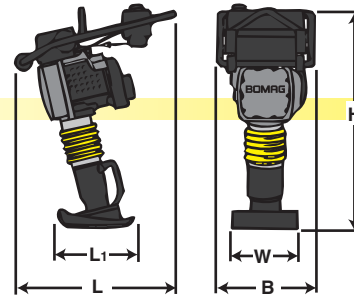

Shipping dimensions

in cubic feet (m³)

BT60/4	19.3	(0.547)
BT65/4	19.3	(0.547)

Standard Equipment

- Reliable Honda 4-stroke engine
- Electronic Ignition
- Oil Lubrication
- Corrosion-free plastic fuel tank
- Polyethylene shoe with steel wear plate
- Centrifugal clutch
- Infinitely variable frequency
- Anti-vibration handle
- Easy access shut-down switch
- Dual air filter system
- Diaphragm carburetor
- Recoil starter with integral guard
- Narrow leg bellows
- Engine protection guards

Optional Equipment

- Transport wheels
- Interchangeable Shoe Kits
6", 9", 11", 13"
- 15" Tall Tamper Foot Extension Kits
4" or 6" shoe widths
- Engine cover
- Service kit

Dimensions

	B	H	L	L ₁	W
BT60/4	13.8 (350)	37.8 (960)	28.9 (735)	13.2 (335)	11.0 (280)
BT65/4	13.8 (350)	39.4 (1000)	28.9 (735)	13.2 (335)	11.0 (280)

Technical data

Weights

	lbs	(kg)	BOMAG BT60/4	BOMAG BT65/4
Basic weight	134	(61)	134 (61)	148 (67)
Operating weight	137	(62)	137 (62)	150 (68)

Dimensions

Dimensions	see sketch	see sketch
------------	------------	------------

Driving characteristics (depending on site conditions)

	ft/min	(m/min)	BOMAG BT60/4	BOMAG BT65/4
Working speed max	65.6	(20)	65.6 (20)	65.6 (20)
Area coverage max	3616	(336)	3616 (336)	3616 (336)

Drive

	Honda	Honda
Engine manufacturer	GX 100 (4-cycle)	GX 100 (4-cycle)
Type	air	air
Cooling	1	1
Number of cylinders	6.0 (98)	6.0 (98)
Displacement	3.4 (2.5)	3.4 (2.5)
Performance ISO 9249	4200	4200
Speed	gasoline	gasoline
Fuel	0.2 (0.8)	0.2 (0.8)
Fuel consumption max	recoil starter	recoil starter
Fuel consumption		
Starting device		

Vibratory System

	mechanical	mechanical
Drive system	540-708 (10-11.8)	540-708 (10-11.8)
Frequency	2.4 (60)	2.8 (70)
Jumping height	3035 (13.5)	3642 (16.2)
Impact force	21.7 (55)	25.6 (65)
Compaction depth max		

Capacities

	gal	(l)	BOMAG BT60/4	BOMAG BT65/4
Fuel	0.8	(3)	0.8 (3)	0.8 (3)
Lubricating oil (tamper cylinder)	0.3	(1)	0.3 (1)	0.3 (1)

Technical modifications reserved. Machine may be shown with options.